







Housings for filter cartridges

STAINLESS STEEL AISI 316 L HOUSINGS

FILTRO FILTERBLACK FBKE-BL-02



Link to PDF product's drawing

v.everblue.it/CadDrawings/F20170314151924547FBKE316BL0220M

FEATURES

Model	FILTRO FILTERBLACK FBKE-BL-02

Material AISI 316 L

In/Out DN 80 FLANGE EN1092

DESIGN DATA

Max working pressure	10 bar	
Hydraulic test pressure	15 bar	

Max working temperature 80°C

Life test 1.000 cycles from 0 to 10 bar

CARTRIDGES

N° cartridges	2
Type end caps	BL
Inner diameter min	90 mm
Outer diameter	200 mm
Cartridges height	20"





APPLICATIONS

Water

Code	Description	Specs, colors and particular finishing	Cartridges height	In/Out	Capacity empty 2 bar (I/min)	End cap	Quantity box	-
FBKE316LBL0220M	FILTRO FILTERBLACK FBKE-BL-02 2x20"	Ceramic blasted	20"	DN 80 FLANGE EN1092	1000	BL	1	








Housings for filter cartridges STAINLESS STEEL AISI 316 L HOUSINGS

FILTRO FILTERBLACK FBKE-BL-02

HOUSINGS CODE LIST

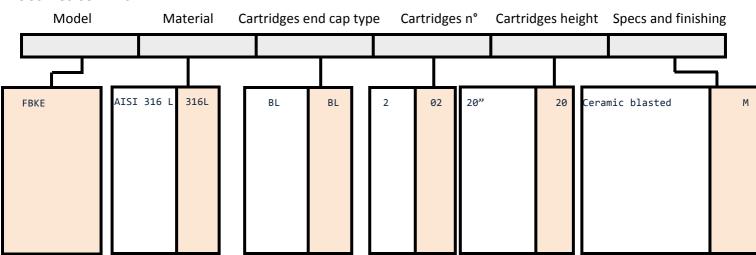



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure



European Community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13
- Article n. 4

Design code: ASME VIII