







Housings for filter cartridges

STAINLESS STEEL AISI 316 L HOUSINGS

FILTRO FM0-B



Link to PDF product's drawing

www.everblue.it/CadDrawings/F20170203153315292MERGED.pdf

FEATURES

Model	FILTRO FM0-B
Material	AISI 316 L
In/Out	1" BSP F

DESIGN DATA

May working pressure

Wax Working pressure	10 841
Hydraulic test pressure	15 bar
Max working temperature	80°C
Life test	200.000 cycles from 0 to 10 bar

10 har

CARTRIDGES

Type end caps Inner diameter min/max Outer diameter DOE BIG 26 mm / 30 mm 115 mm	N° cartridges	1
Inner diameter min/max 26 mm / 30 mm Outer diameter 115 mm	•	DOE BIG
Outer diameter 115 mm		
	· · · · · · · · · · · · · · · · · · ·	•
	Cartridges height	9" ¾ - 20"

APPLICATIONS

Water

Code	Description	Specs, colors and particular finishing	Cartridges height	In/Out	Capacity empty 2 bar (I/min)	End cap	Quantity box	1
FM0316LB0109M	FILTRO FM0-B 1x9" ¾	Ceramic blasted	9″ ¾	1" BSP F	106	В	1	
FM0316LB0120M	FILTRO FM0-B 1x20"	Ceramic blasted	20"	1" BSP F	106	В	1	








Housings for filter cartridges STAINLESS STEEL AISI 316 L HOUSINGS

FILTRO FM0-B

HOUSINGS CODE LIST

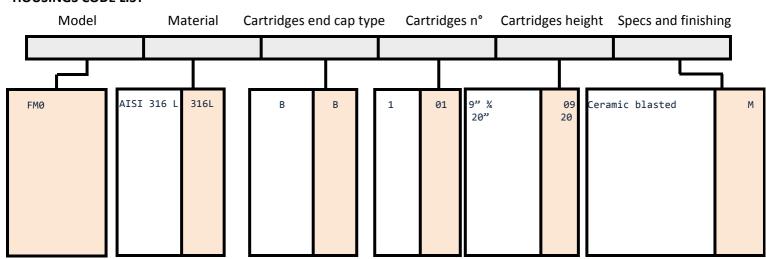



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure



European Community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13 Article n. 4