







Housings for filter cartridges

FIBERGLASS HOUSINGS

FILTRO FIB-FON-04



Link to PDF product's drawing

.everblue.it/CadDrawings/F20150226155629939FIBFRPFON0440WH

FEATURES

Model	FILTRO FIB-FON-04		
Material	FRP		
In/Out	DN 150 FLANGE L		

DESIGN DATA

Max working pressure	6 bar
Hydraulic test pressure	9 bar
Max working temperature	50°C
Life test	1.000 cycles from 0 to 10 bar

CARTRIDGES

N° cartridges	4
Type end caps	FON
Inner diameter min	76 mm
Outer diameter	147,5 mm
Cartridges height	40"



APPLICATIONS

Water

Sea water

Code	Description	Specs, colors and particular finishing	Cartridges height	In/Out	Capacity empty 2 bar (I/min)	End cap	Quantity box	-
FIBFRPFON0440WH	FILTRO FIB-FON-04 4x40"	White	40"	DN 150 FLANGE L	3333	FON	1	








Housings for filter cartridges FIBERGLASS HOUSINGS

FILTRO FIB-FON-04

HOUSINGS CODE LIST

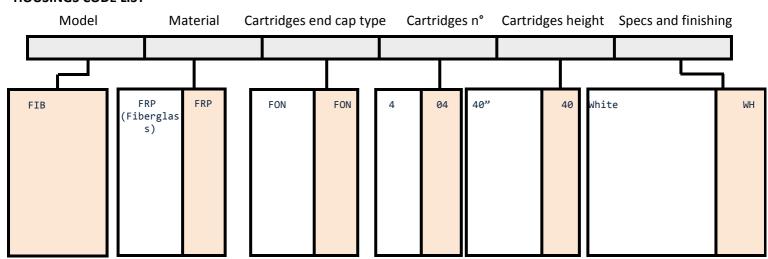



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

European Community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13
- Article n. 4

Design code: EN 13121-3