







Housings for filter cartridges

FIBERGLASS HOUSINGS

FILTRO FILTERBLUE-BL-03-2RS



Link to PDF product's drawing

verblue.it/CadDrawings/F20160728094104125FBL2RSFRPBL0620W

FEATURES

Model	FILTRO FILTERBLUE-BL-03-2RS
Material	FRP
In/Out	DN 125 FLANGE DN8063 PN16

DESIGN DATA

Max working pressure	10 bar
Hydraulic test pressure	15 bar
Max working temperature	50°C
Life test	1.000 cycles from 0 to 10 bar

CARTRIDGES

· · · · · · · · · · · · · · · · · · ·	
N° cartridges	6
Type end caps	BL
Inner diameter min	90 mm
Outer diameter	200 mm
Cartridges height	20"





APPLICATIONS

Water

Sea water

Code	Description	Specs, colors and particular finishing	Cartridges height	In/Out	Capacity empty 2 bar (I/min)	End cap	Quantity box	-
FBL2RSFRPBL0620WH	FILTRO FILTERBLUE-BL-03-2RS 6x20"	White	20"	DN 125 FLANGE DN8063 PN16	2333	BL	1	








Housings for filter cartridges FIBERGLASS HOUSINGS

FILTRO FILTERBLUE-BL-03-2RS

HOUSINGS CODE LIST

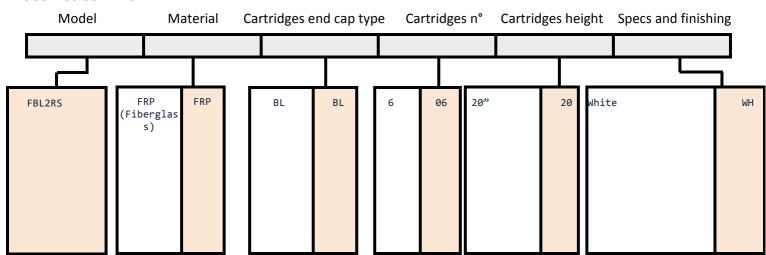



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Link to product's details pictures, installation pictures

http://www.everblue.it/OtherInstallPics/INS_FILTROFILTERBLUE-BL-3-2RS.PDF



European Community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014.

These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13

Design code: EN 13121-3 - ASME X (for body)