

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSA-3RS

 [Link to product's PDF drawing](http://www.everblue.it/CadDrawings/F20170712104022177FBSA3RS31632500FA_1.pdf)
(http://www.everblue.it/CadDrawings/F20170712104022177FBSA3RS31632500FA_1.pdf)

FEATURES

Model	FILTRO FBSA-3RS
Material	AISI 316
Height and Connections	32" DN125 FLANGE ANSI
Continuous flow	No
Micron	25 - 50 - 100 - 150 - 250 - 400 - 800 - 1000 - 2000 - 3000

DESIGN DATA

Max working pressure	10 bar
Hydraulic test pressure	12 bar
Max working temperature	80°C
Life test	100.000 cicli da 0 a 8 bar

APPLICATIONS

Water

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSA-3RS

Code	Description	Surface area	Height - Connection In/Out	Connection drain	Micron	Flow rate (l/h) ¹	Quantity box	-
FBSA3RS31632500FA25M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	25	90.000	1	
FBSA3RS31632500FA50M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	50	90.000	1	
FBSA3RS31632500FA100M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	100	120.000	1	
FBSA3RS31632500FA150M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	150	120.000	1	
FBSA3RS31632500FA250M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	250	120.000	1	
FBSA3RS31632500FA400M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	400	150.000	1	
FBSA3RS31632500FA800M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	800	150.000	1	
FBSA3RS31632500FA1000M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	1000	150.000	1	
FBSA3RS31632500FA2000M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	2000	150.000	1	
FBSA3RS31632500FA3000M	FILTRO FBSA-3RS	0,99 m ²	32" DN125 FLANGE ANSI	½" BSP F	3000	150.000	1	

¹Max clean water flow rate in l/h at 20°C and differential pressure 0,15 bar.



European community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13
- Article n. 4

Design code:

VIII

Filters with strainer STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSA-3RS

FILTERS WITH STRAINER CODE LIST

Model		Material		Height - Connection IN/OUT		Micron		Specs and finishing	
FILTRO FBSA-3RS		AISI 316		32" DN125 FLANGE ANSI		25 50 100 150 250 400 800 1000 2000 3000		Ceramic blasted	
FBSA3RS		316		32500FA		25 50 100 150 250 400 800 1000 2000 3000		M	



Approximate picture. Connections and measures choice will lead to the assembly of a product which could differ from those shown in figure


Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSA-3RS

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

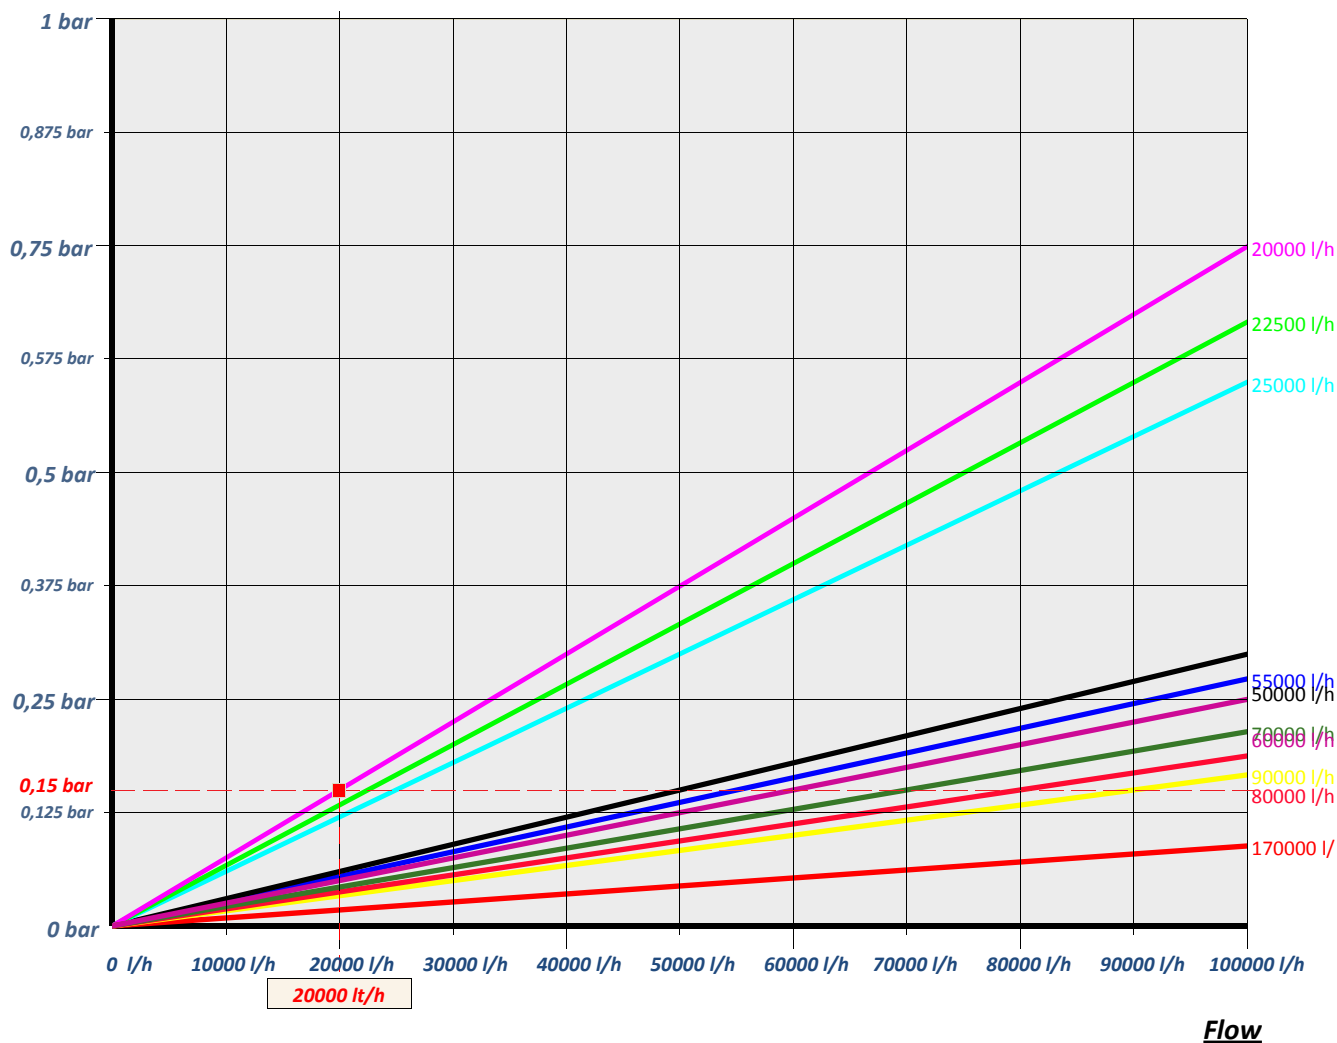

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSA-3RS