



Profi-Reels

Push cable	30 m high flexible (6 mm ø)	60 / 80 m high flexible (9 mm ø)
Prepared for pluggable camera heads	×	×
Integrated digital meter counter	×	~
Stable ball joint with quick-change system for the control unit	×	 Image: A second s
Stepless adjustable brake	~	 Image: A second s
Switchable brake rewind (prevents accidental unwinding of the push cable)	×	✓
Power supply via control unit	×	×
Material	Steel powder-coated	Stainless Steel
Dimensions (L x W x H)	380 x 310 x 520 mm	660 x 440 x 730 mm
Weight	ca. 7.5 kg	ca. 19 kg

SHP-6.30

SHP-9X

SHP-6.30

Our smallest system for the areas sanitary, installation or house connection. Due to the small dimensions it optimally works in tight spaces as kitchen or bathroom.








Our professional system for industrial, civil engineering and municipal applications. It is ideal for leak testing, rehabilitation, pipe cleaning or the traditional pipe inspection. The sturdy construction makes it very robust and stable.

The two independently operating brakes make your daily work and prevent unwanted unwinding of the push cable. A detachable carrying bag for power supply, cables, etc. provides a neat optic and you always have everything close to hand.

The handle can be extended for an ergonomic operation on an individual working height. The quick fastener closes easily, quickly and torsion secure.





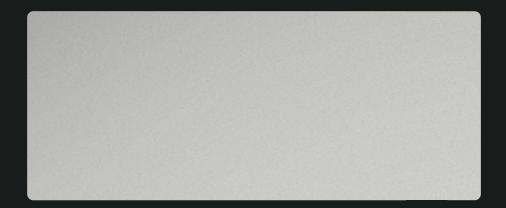

RIEZLER Inspektionssysteme GmbH & Co. KG

Sportplatzweg 5 | 87471 Durach | Germany Tel. +49 (831) 27714 | info@riezler.eu | www.riezler.eu