

# **HC201**

# **Humidity Sensors for HVAC Applications**

### **Typical Applications**

**Features** 

HVAC hand helds humidifiers dehumidifiers high repeatability
high sensitivity
wettable
very good long term stability
good resistance to pollutants
small size construction

#### **Technical Data**

Nominal capacitance C <sub>16</sub> (at 20°C / 68°F) Sensitivity	200 ± 30 pF 0.6 pF / % RH		
Working range	Humidity 1095% RH		
Working range	Temperature -40110°C (-40230°F)		
Linearity armer (20, 000/ DII)	•		
Linearity error (2090% RH)	< ± 2% RH		
Hysteresis	2.0 ± 0.3% RH		
Response time t	< 15 sec		
Temperature dependence [%RH /°C]	$\Delta RH = g * RH * (T - 20)$ $g = -0.004 \pm 10 \%$		
Long term stability at 20-30°C (68-86°F) / 20-80% RH	drift < 1.5 % / year		
Loss tangent	< 0.1 typical		
Maximum supply voltage (no DC voltage)	5 V max (Upp)		
Maximum DC voltage	< 5 mV		
Operating frequency	10100 kHz, recommended 20 kHz		
Material connection	phosphor bronze with tin coating		
Packaging			


HC201 taped
HC201/H in tube (80 pcs packing unit)
HC201/G taped

#### **Characteristics**

The average increase of capacitance over the working range is 50pF. For the range of 20-90% RH, linear approximation is possible, errors will be lower than  $\pm 2\%$  RH.

The sensor characteristic is described by the following linear formula:

$$C(RH) = C_{76} * [1 + HK * (RH - 76)]$$
  
with HK = 2700 ± 250 ppm /% RH

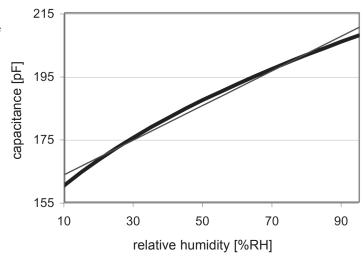


# Working Range\_

The working range for the humidity sensor HC201 is shown with regard to the humidity / temperature limits.


Although the sensors would not fail beyond the limits, the specification is guaranteed only within the working range.

In applications with high humidity at high temperature the time factor shall be considered.



## Dimensions (mm)\_

1 mm = 0.03937" / 1" = 25.4 mm

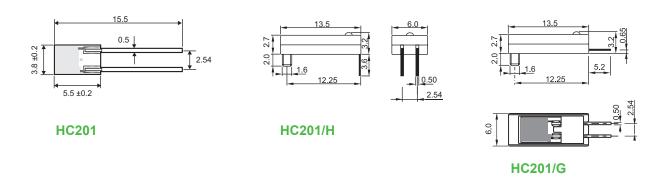

# Ordering Guide \_

MODE	TYPE	
	capacitive humidity sensor 200 pF capacitive humidity sensor 200 pF with PC housing for mounting on the printed ciruit board capacitive humidity sensor 200 pF with PC housing	(201) (201/H) (201/G)
НС		

HC201 81