

## Washable filtration cartridges

# WASHABLE NYLON NET CARTRIDGE

## RLA75



[Link to PDF product's drawing](http://www.everblue.it/CadDrawings/RLA75ST.PDF)

(<http://www.everblue.it/CadDrawings/RLA75ST.PDF>)

### FEATURES

Model	RLA75
Type	Washable net
Height	9" $\frac{3}{4}$ - 20"

Micron	80
Efficiency	75%

Hot sanitizing	No
----------------	----

### APPLICATIONS

Water
Sea water

### MATERIAL

Filtration material	Nylon net
Internal core	None
External core	Polypropylene

### PRESSURE

Max working pressure	6 bar
Max differential pressure suggested	1 bar

### TEMPERATURE

Max working temperature	80°C
-------------------------	------

Code	Description	Height <sup>2</sup>	Micron	Flow l/h <sup>1</sup>	Filtering surface	Quantity box	-
RLA750980	RLA75 09-80	9" $\frac{3}{4}$	80	3.500	0,05 m <sup>2</sup>	70	
RLA752080	RLA75 20-80	20"	80	7.000	0,10 m <sup>2</sup>	35	



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

# RLA75

### END CAPS LIST

<b>End caps</b>	DOE
<b>CODE</b>	ST



### CARTRIDGE CODE LIST

Model	Height	Micron	Connection	Seals										
RLA75	<table border="1"> <tr> <td>9" ¾</td> <td>09</td> </tr> <tr> <td>20"</td> <td>20</td> </tr> </table>	9" ¾	09	20"	20	<table border="1"> <tr> <td>80</td> <td>80</td> </tr> </table>	80	80	<table border="1"> <tr> <td>DOE (Standard)</td> <td>ST</td> </tr> </table>	DOE (Standard)	ST	<table border="1"> <tr> <td>*PVC</td> <td>PVC</td> </tr> </table> <p>* standard o-ring</p>	*PVC	PVC
9" ¾	09													
20"	20													
80	80													
DOE (Standard)	ST													
*PVC	PVC													


# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

### RLA75

#### FLOW RATE VS PRESSURE DIFFERENTIAL

**Pressure differential**

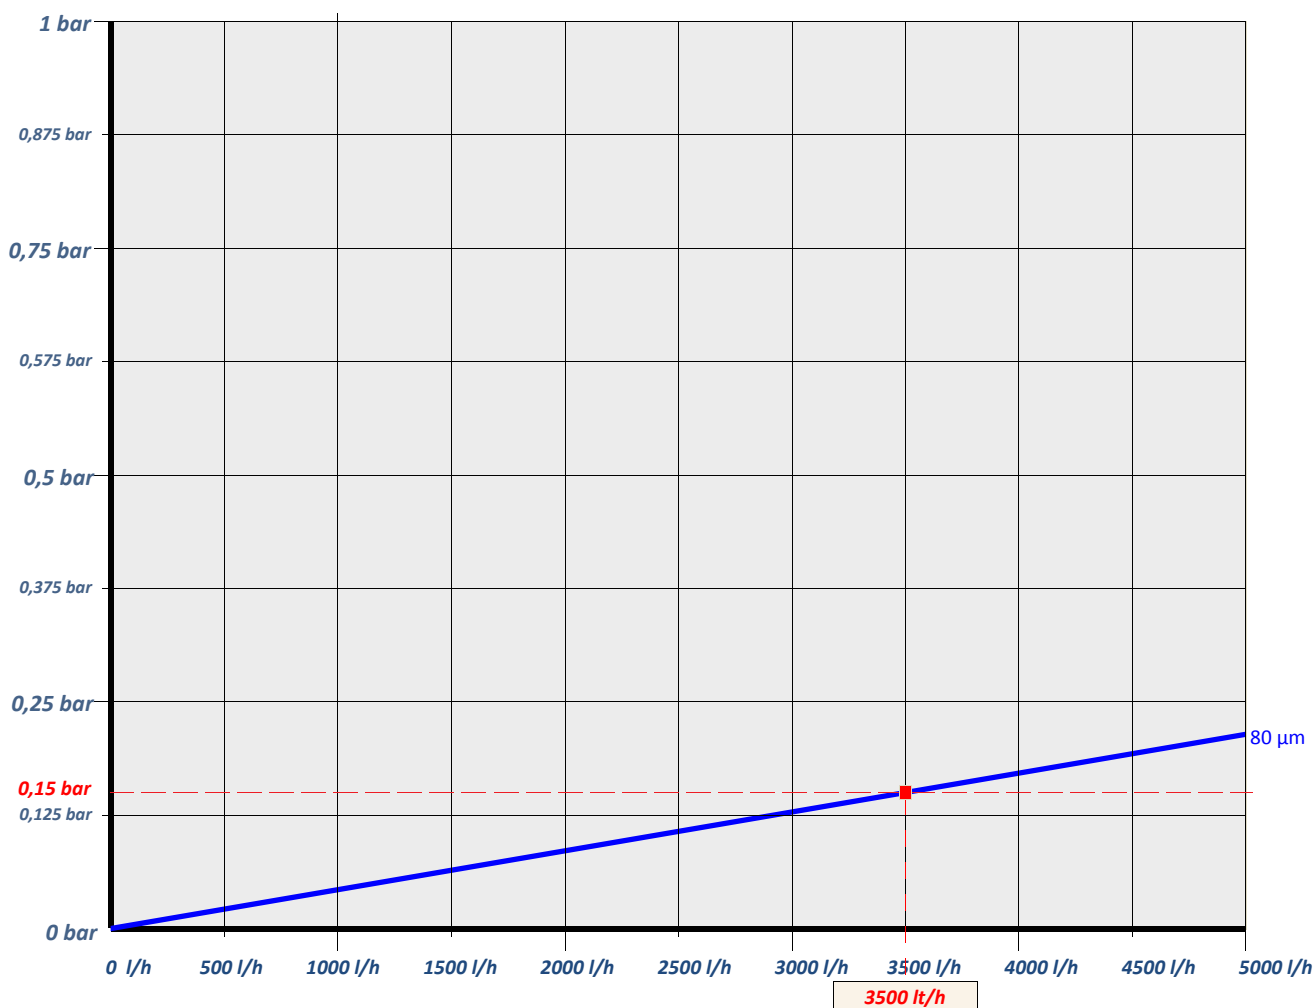

Graphic refers to 9" ¼ height cartridges. Make the correct proportion to obtain flow for taller cartridges.

**Flow**