





# Housings for filter cartridges STAINLESS STEEL AISI 316 L HOUSINGS

### **FILTRO FM0**



#### Link to PDF product's drawing

erblue.it/CadDrawings/F20151214122655720FM0316LST0109\_I\_me

#### **FEATURES**

Model	FILTRO FM0
Material	AISI 316 L
In/Out	¾" BSP F

#### **DESIGN DATA**

Max working pressure	10 bar
Hydraulic test pressure	15 bar

Max working temperature	80°C
wax working temperature	00 0

Life test 200.000 cycles from 0 to 10 bar

#### **CARTRIDGES**

N° cartridges	1
Type end caps	DOE (Standard)
Inner diameter min/max	27 mm / 30 mm
Outer diameter	70 mm
Cartridges height	9" ¾ - 10" - 20" - 30" - 40"



#### **APPLICATIONS**

Water

Code	Description	Specs, colors and particular finishing	Cartridges height	In/Out	Capacity empty 2 bar (I/min)	End cap	Quantity box	-
FM0316LST0109M	FILTRO FM0 1x9" ¾	Ceramic blasted	9" ¾	¾" BSP F	66	ST	1	
FM0316LST0110M	FILTRO FM0 1x10"	Ceramic blasted	10"	¾" BSP F	66	ST	1	
FM0316LST0120M	FILTRO FM0 1x20"	Ceramic blasted	20"	¾" BSP F	66	ST	1	
FM0316LST0130M	FILTRO FM0 1x30"	Ceramic blasted	30"	¾" BSP F	66	ST	1	
FM0316LST0140M	FILTRO FM0 1x40"	Ceramic blasted	40"	¾" BSP F	66	ST	1	








## Housings for filter cartridges STAINLESS STEEL AISI 316 L HOUSINGS

### FILTRO FM0

#### **HOUSINGS CODE LIST**

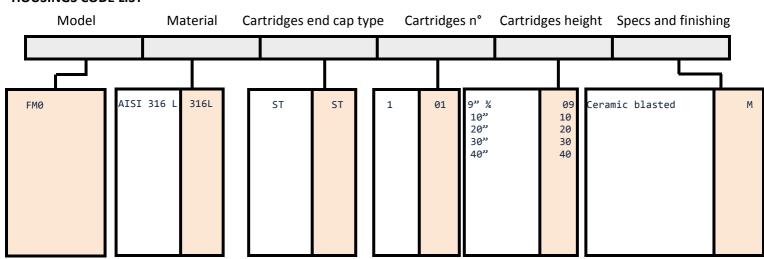



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

<u>Link to product's details pictures, installation pictures</u> http://www.everblue.it/OtherInstallPics/INS\_FILTROFM0-01.PDF



#### **European Community members only.**

These filteres are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014.

These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13