

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSF



[Link to product's PDF drawing](http://www.everblue.it/CadDrawings/F20150724140849675FBSF_MERGED.pdf)

(http://www.everblue.it/CadDrawings/F20150724140849675FBSF_MERGED.pdf)

FEATURES

Model	FILTRO FBSF
Material	AISI 316
Height and Connections	17" 2" BSP F, 32" 2" BSP F, 17" DN50 FLANGE EN1092, 32" DN50 FLANGE EN1092
Continuous flow	No
Micron	25 - 50 - 100 - 150 - 250 - 400 - 800 - 1000 - 2000 - 3000

DESIGN DATA

Max working pressure	10 bar
Hydraulic test pressure	12 bar
Max working temperature	80°C
Life test	100.000 cicli da 0 a 8 bar

APPLICATIONS

Water

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSF

Code	Description	Surface area	Height - Connection In/Out	Connection drain	Micron	Flow rate (l/h) ¹	Quantity box	-
FBSF31617200FT25	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	25	15.000	1	
FBSF31617200FT50	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	50	15.000	1	
FBSF31617200FT100	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	100	20.000	1	
FBSF31617200FT150	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	150	20.000	1	
FBSF31617200FT250	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	250	20.000	1	
FBSF31617200FT400	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	400	20.000	1	
FBSF31617200FT800	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	800	20.000	1	
FBSF31617200FT1000	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	1000	20.000	1	
FBSF31617200FT2000	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	2000	20.000	1	
FBSF31617200FT3000	FILTRO FBSF	0,17 m ²	17" 2" BSP F	1/4" BSP F	3000	20.000	1	
FBSF31617200FF25	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	25	15.000	1	
FBSF31617200FF50	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	50	15.000	1	
FBSF31617200FF100	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	100	20.000	1	
FBSF31617200FF150	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	150	20.000	1	
FBSF31617200FF250	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	250	20.000	1	
FBSF31617200FF400	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	400	20.000	1	
FBSF31617200FF800	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	800	20.000	1	
FBSF31617200FF1000	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	1000	20.000	1	
FBSF31617200FF2000	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	2000	20.000	1	
FBSF31617200FF3000	FILTRO FBSF	0,17 m ²	17" DN50 FLANGE EN1092	1/4" BSP F	3000	20.000	1	
FBSF31632200FT25	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	25	20.000	1	
FBSF31632200FT50	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	50	20.000	1	
FBSF31632200FT100	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	100	25.000	1	
FBSF31632200FT150	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	150	25.000	1	
FBSF31632200FT250	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	250	25.000	1	
FBSF31632200FT400	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	400	25.000	1	
FBSF31632200FT800	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	800	25.000	1	
FBSF31632200FT1000	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	1000	25.000	1	
FBSF31632200FT2000	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	2000	25.000	1	
FBSF31632200FT3000	FILTRO FBSF	0,33 m ²	32" 2" BSP F	1/4" BSP F	3000	25.000	1	

Filters with strainer

STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSF

Code	Description	Surface area	Height - Connection In/Out	Connection drain	Micron	Flow rate (l/h) ¹	Quantity box	-
FBSF31632200FF25	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	25	20.000	1	
FBSF31632200FF50	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	50	20.000	1	
FBSF31632200FF100	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	100	25.000	1	
FBSF31632200FF150	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	150	25.000	1	
FBSF31632200FF250	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	250	25.000	1	
FBSF31632200FF400	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	400	25.000	1	
FBSF31632200FF800	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	800	25.000	1	
FBSF31632200FF1000	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	1000	25.000	1	
FBSF31632200FF2000	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	2000	25.000	1	
FBSF31632200FF3000	FILTRO FBSF	0,33 m ²	32" DN50 FLANGE EN1092	1/4" BSP F	3000	25.000	1	

¹Max clean water flow rate in l/h at 20°C and differential pressure 0,15 bar.

European community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the directive P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned as shown in the following:

- Article n. 13
- Article n. 4



Filters with strainer STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSF

FILTERS WITH STRAINER CODE LIST

Model		Material		Height - Connection IN/OUT		Micron		Specs and finishing	
FILTRO FBSF	FBSF	AISI 316	316	17" 2" BSP F 32" 2" BSP F 17" DN50 FLANGE EN1092 32" DN50 FLANGE EN1092	17200FT 32200FT 17200FF 32200FF	25 50 100 150 250 400 800 1000 2000 3000	25 50 100 150 250 400 800 1000 2000 3000		




Approximate picture. Connections and measures choice will lead to the assembly of a product which could differ from those shown in figure

Filters with strainer
STEEL AISI 316 HOUSINGS WITH STRAINER

FILTRO FBSF

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

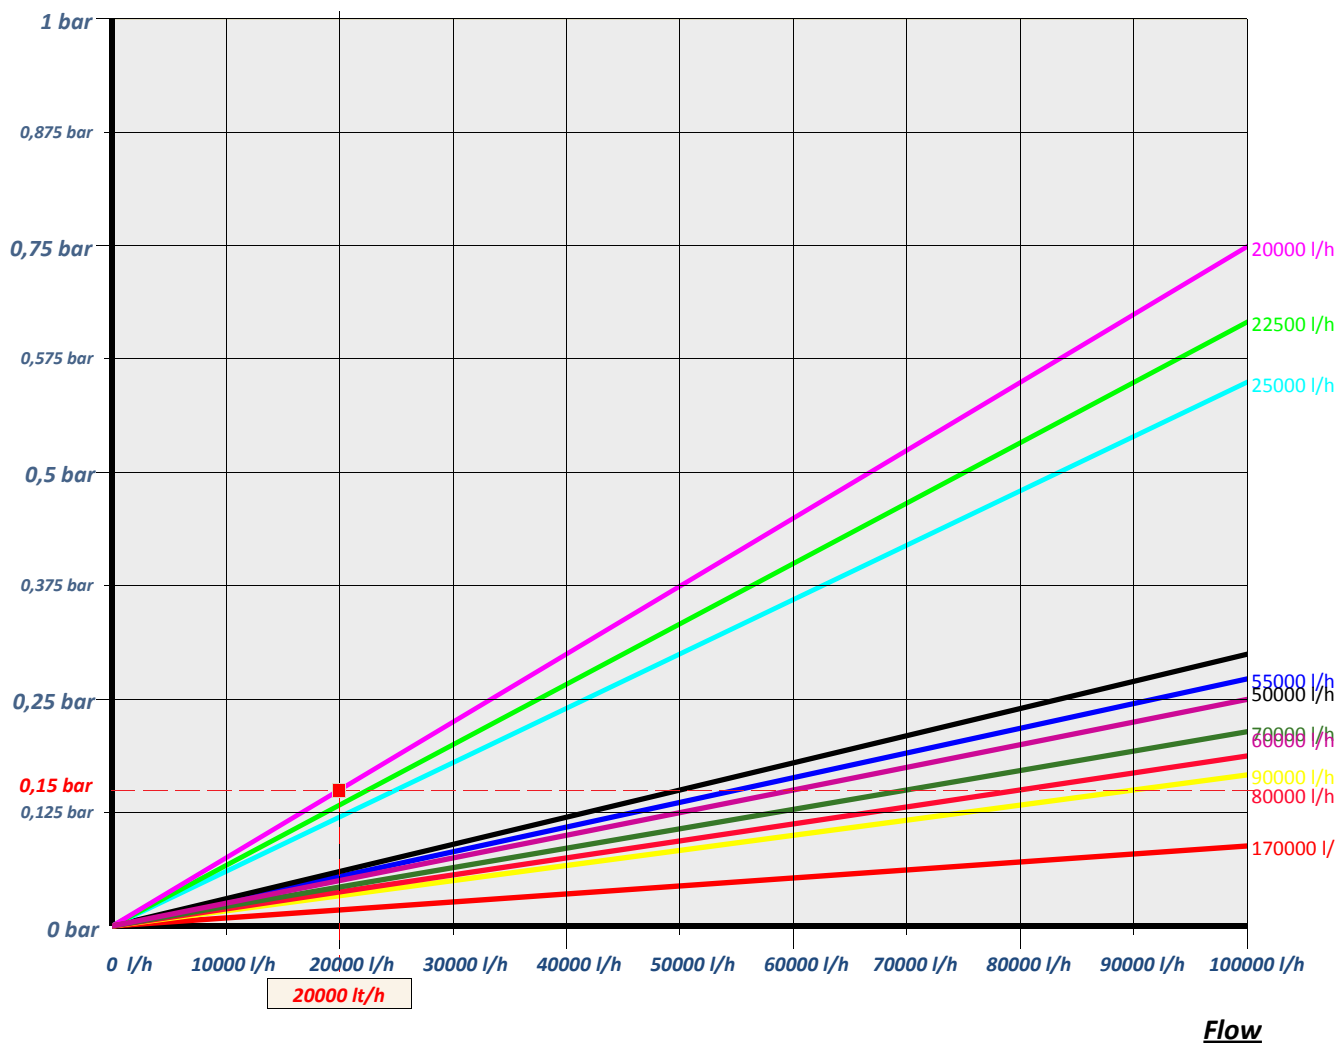

Filters with strainer
STEEL AISI 316 HOUSINGS WITH STRAINER
FILTRO FBSF