



iTRANS 2



- Large Sensor Offering – Electrochemical, Catalytic and Infrared
- Non-Intrusive Calibration
- Smart Sensor
- HART (optional)
- RS-485 Modbus
- Programmable Relays (optional)
- Dual Gas Sensing (optional)

Applications

- Oil and Gas Industry
- Offshore Drilling
- Utilities and Power
- Petrochemical Industry
- Municipal Water and Waste Treatment
- Food and Beverage Production



Sensors

- The iTRANS 2 is available with sensors for most common gases including: Infrared Combustible, Catalytic Bead Combustible and electrochemical sensors. It can support simultaneous detection from two sensors, either directly attached to the display, or remote sensors. Please note that the IR Combustible Sensor is not approved for use by CSA.

Versatile

The iTRANS 2 can be configured to meet nearly any application through its state-of-the-art features and options.

- Explosion-proof
- HART (optional)
- RS-485 Modbus
- Stainless Steel Enclosure (optional)
- Programmable Relays (optional)
- 3-wire, 4-wire Installations
- Dual Gas Sensing (optional)
- Remote Sensing (optional)
- Large Sensor Offering – Electrochemical, Catalytic and Infrared

Easy to use

- Smart Sensor
- Non-Intrusive Calibration
- Dual-channel split-screen LED display

Certifications




Other features and benefits

Dual Gas Sensing	The iTRANS 2 can detect and display up to two gases on certain models. Both gas sensors may be mounted directly to the transmitter, or may be mounted remotely.
Wide Sensor Offering	The iTRANS 2 supports Electrochemical, Catalytic Bead and Infrared sensors. The iTRANS 2 is available for most common industrial gases, allowing of standardization for your gas detection equipment.
Smart Sensors	The iTRANS 2's smart sensors come factory pre-calibrated and automatically send sensor information, such as sensor life, to the transmitter. A sensor life indicator is displayed immediately after each calibration.
Dual-channel split-screen LED display	For optimum visibility in dark places
Non-Intrusive Calibration	The iTRANS 2's non-intrusive interface keys operate with a simple magnetic wand and allow for full transmitter configuration and calibration without opening the unit's explosion-proof housing.
Programmable Relays	The microprocessor-controlled transmitters are capable of independent operation or multi-point system configuration. With optional on-board relays, the monitor has the added ability of stand-alone operation, activating alarms, horns or fans, and can also shut down a system without the need to wire back to a central control panel.
Multiple Wiring Options	The iTRANS 2 can be configured to meet almost any installation application. Common configurations includes: 3-Wire (4-20mA) Models - Allow for full utilization of the iTRANS 2's features and options and can be used with all of the iTRANS 2's sensors. 4-Wire (Digital ModBus) Models - Allows for full utilization of the iTRANS 2's features and options and can be used with all of the iTRANS 2's sensors.
HART™ Communication Protocol	With the optional HART Communication Protocol, the iTRANS 2 offers remote diagnostics, set-up or calibration by super-imposing a high-frequency current across the industry standard 4-20mA analog line.
Stainless Steel Enclosure	An optional stainless steel enclosure for corrosive environments.

Ordering information

iTrans 2 offers a wide variety of sensor configurations and relay options for maximum flexibility and affordability. Use the following guide to select the options that best fit your monitoring needs and applications. Oldham recommends that a fixed system application survey be completed to help provide the most accurate assessment of your equipment requirements

iTrans 2 Base Part Number: iTrans 2-ABCDEF G (sensor options listed below) Magnetic calibration tool, and calibration cup are standard items with all iTrans 2 monitors. Questions? Visit us at www.TycoGFD.com

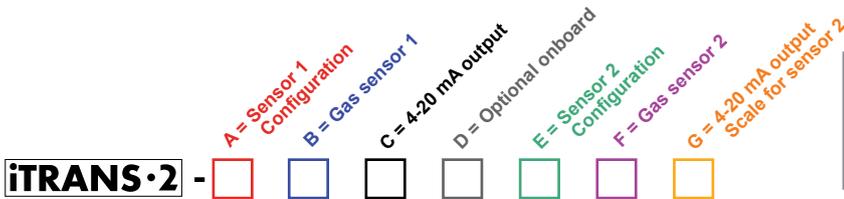


Example: iTrans 2 - 1C21241
An iTrans 2 with an on-board LEL (4-20 mA scale 0-100) and remote mount H2S (4-20 mA scale 0-500) with optional relays and Modbus RTU

A	B	C	D	E	F	G
Sensor 1 Configuration	Gas sensor 1	4-20 mA Output Scale for Sensor 1	Optional on Board Relays	Sensor 2 Configuration	Gas sensor 2	4-20 mA Output Scale for Sensor 2
1 — Explosion proof / On-Board	1 — CO ●	0 — 0-999	0 — No Relay Modules (Modbus)	0 — No sensor	1 — CO ●	0 — 0-999
2 — Explosion proof / remote*	2 — NO ●	1 — 0-500	1 — With On-Board Relays (Modbus)	1 — Explosion proof / On-Board**	2 — NO ●	1 — 0-500
3 — Non-hazardous remote / Duct mount*	3 — NH ₃ ●	2 — 0-100	2 — No Relay Module (Hart)	2 — Explosion proof / remote*	3 — NH ₃ ●	2 — 0-100
4 — Explosion proof / On-Board with Splash Guard	4 — H ₂ S ●	3 — 0-50	3 — With On-Board Relays (Hart)	3 — Non-hazardous remote / Duct mount*	4 — H ₂ S ●	3 — 0-50
5 — Explosion proof / Remote with Splash Guard*	5 — SO ₂ ●	4 — 0-30		4 — Explosion proof / On-Board with Splash Guard**	5 — SO ₂ ●	4 — 0-30
6 — Stainless Steel / On-Board	6 — NO ₂ ●	5 — 0-10		5 — Explosion proof / Remote with Splash Guard*	6 — NO ₂ ●	5 — 0-10
7 — Stainless Steel / Remote*	7 — Cl ₂ ●	6 — 0-2		7 — Stainless Steel / Remote*	7 — Cl ₂ ●	6 — 0-2
8 — Explosion proof / Dual sensors / Single remote enclosure**	8 — ClO ₂ ●	7 — 0-1		8 — Explosion proof / Dual sensors / Single remote enclosure**	8 — ClO ₂ ●	7 — 0-1
	9 — HCN ●	8 — 0-20			9 — HCN ●	8 — 0-20
	A — O ₂ ●	9 — 0-200			A — O ₂ ●	9 — 0-200
	B — Methane by LEL (catalytic) ◆	A — 0-5.00			B — Methane by LEL (catalytic) ◆	A — 0-5.00
	C — Pentane by LEL (catalytic) ◆	B — 0-0.50			C — Pentane by LEL (catalytic) ◆	B — 0-0.50
	D — CO/null H ₂ ●				D — CO/null H ₂ ●	
	F — HCl ●				F — HCl ●	
	K — PH ₃ ●				K — PH ₃ ●	
	L — H ₂ ●				L — H ₂ ●	
	M*** — Methane by vol. ▲				M*** — Methane by vol. ▲	
	N*** — Methane by LEL ▲				N*** — Methane by LIE ▲	
	O*** — Propane ▲				O*** — Propane ▲	
	Q*** — Pentane ▲				Q*** — Pentane ▲	
	R*** — Butane ▲				R*** — Butane ▲	
	U*** — Hexane ▲				U*** — Hexane ▲	
	V — CO ₂ (0-5 %) ▲				V — CO ₂ (0-5 %) ▲	
	W — CO ₂ (0-100 %) ▲				W — CO ₂ (0-100 %) ▲	
	X — CO ₂ (0-0.5 %) ▲				X — CO ₂ (0-0.5 %) ▲	

● = electrochemical
▲ = IR
◆ = catalytic

* Remote sensor maximum distance = 200m
** Dual On-Board are CSA certified only.
Consult factory for availability, additional gases, ranges and certification information.
*** IR combustible sensor modules are not CSA certified

Accessories	Part number	Image Code
By-Pass / Flow-thru Kit	P/N 77014579	a
Splash guard / remote Cal Cup for Toxic, O ₂ , and LEL	P/N. 77015303	b
iTrans 2 Calibration Wand	P/N. 77024065	c
iTrans 2 Splash guard	P/N. 77023588	d
iTrans 2 Calibration Cup	P/N. 77023513	e

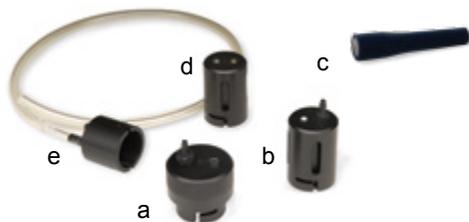

Measuring ranges	
Combustible Gases	0-100% LEL in 1% increments
Methane (by Vol)	0-100% by Volume in 1% increments
Hydrogen	0-999 ppm in 1 ppm increments
Oxygen	0-30% by Volume in 0.1% increments
Ammonia	0-500 ppm in 1 ppm increments
Carbon Monoxide	0-999 ppm in 1 ppm increments
Hydrogen Sulfide	0-500 ppm in 1 ppm increments
Sulfur Dioxide	0.2-99.9 ppm in 0.1 ppm increments
Hydrogen Cyanide	0.2-30 ppm in 0.1 ppm increments
Hydrogen Chloride	0.2-30 ppm in 0.1 ppm increments
Phosphine	0-1 ppm in 0.01 ppm increments
Nitrogen Dioxide	0.2-99.9 ppm in 0.1 ppm increments
Nitric Oxide	0-999 ppm in 1 ppm increments
Chlorine	0.2-99.9 ppm in 0.1 ppm increments
Chlorine Dioxide	0-100% by Volume in 1% increments
Carbon Dioxide	0-100% by Volume in 1% increments
Carbon Dioxide	0-0.5% by Volume in 0.01% increments
Carbon Dioxide	0-5% by Volume in 0.01% increments

Technical specifications							
Sensors	Combustible Gases: Catalytic, Infrared Toxic / Oxygen: Electrochemical, Infrared (CO ₂)						
Warranty from date of shipment	2 years on electronics 3 years on infrared sensors (CO ₂ and LEL) 2 years on catalytic (LEL), CO and H ₂ S sensors 18 months on O ₂ sensors 12 months on other sensors						
Detected Gases	See Ordering Guide						
Material	Epoxy Coated Aluminium or 316 Stainless Steel						
Display	Dual-channel split-screen LED display (4 digit, 7 segment arrangement per channel) provides simultaneous display of one or two gases.						
Input voltage	12-28VDC operating range (24VDC typical)						
Power Consumption	150mA@24VDC (Electrochemical sensor) 250mA@24VDC (Combustible gases catalytic) 0.8A peak (single gas) 170mA@24VDC (Combustible gases Infrared) 0.5A peak (single gas) 350mA@24VDC (Combined catalytic/Infrared) 1.2A peak (two gas)						
Ingress Protection	NEMA 4X, IP66						
Response Time (catalytic methane)	T50: < 10 seconds T90: < 30 seconds						
Humidity Range	10-90% RH (non-condensing), typical						
Dimensions	127 x 153 x 129 mm (5.0" x 6.0" x 5.1"), 2.9 Kg (6.4 lbs)						
Cable	3-wire or 4-wire						
Maximum Cable Loop	15 Ohm (3-wire configs) 10 Ohm (4-wire configs)						
Output Signal:	Standard: 4-20mA (source) + RS-485 Modbus (9600 baud) Optional: HART Protocol						
Alarm relays (opt)	3 alarm relays (5 Amps at 30VDC) Two user-programmable relays, SPST, N.O. One fault relay, SPST, N.C.						
Homologations Sensor Specific	<table border="0"> <tr> <td>c CSA_{US} *</td> <td>Class I, Div 1, Groups B, C, D Ex d IIB + H2 T5 AEx d IIB + H2T5⁽¹⁾</td> </tr> <tr> <td>ATEX and IECEx</td> <td>Class I, Div 2, Groups A, B, C, D⁽²⁾ II 2G - Ex db IIB + H2 T5 Gb⁽¹⁾ II 3G - Ex na IIC T5 Gc⁽²⁾</td> </tr> <tr> <td>China</td> <td>GYB 15.162 1X - Ex d IIB + H2 T5 Gb GB15322.1-2003 Fire protection</td> </tr> </table>	c CSA _{US} *	Class I, Div 1, Groups B, C, D Ex d IIB + H2 T5 AEx d IIB + H2T5 ⁽¹⁾	ATEX and IECEx	Class I, Div 2, Groups A, B, C, D ⁽²⁾ II 2G - Ex db IIB + H2 T5 Gb ⁽¹⁾ II 3G - Ex na IIC T5 Gc ⁽²⁾	China	GYB 15.162 1X - Ex d IIB + H2 T5 Gb GB15322.1-2003 Fire protection
c CSA _{US} *	Class I, Div 1, Groups B, C, D Ex d IIB + H2 T5 AEx d IIB + H2T5 ⁽¹⁾						
ATEX and IECEx	Class I, Div 2, Groups A, B, C, D ⁽²⁾ II 2G - Ex db IIB + H2 T5 Gb ⁽¹⁾ II 3G - Ex na IIC T5 Gc ⁽²⁾						
China	GYB 15.162 1X - Ex d IIB + H2 T5 Gb GB15322.1-2003 Fire protection						

(1) Combustible gases, Hydrogen, Oxygen, Carbon Monoxide, Hydrogen Sulfide, Sulfur Dioxide, Hydrogen Cyanide, Phosphine, Nitrogen Dioxide, Nitric Oxide, Carbon Dioxide.

(2) Ammonia, Hydrogen Chloride, Chlorine, Chlorine Dioxide.

* IR combustible sensors are not CSA certified

As an ISO 9001 & ISO 14001 approved company, OLDHAM quality assurance programmes demand the continuous assessment and improvement of all OLDHAM products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact OLDHAM or their representative if you require more details.

EMEA
Tel: +33 (0) 3 21 60 80 80
Fax: +33 (0) 3 21 60 80 00
oldhamgas-info-fr@tyco.com

AMERICAS
Tel: +1 713-559-9200
Fax: +1 281-292-2860
sh-sale@tycoint.com

ASIA PACIFIC
Tel: +86 21 3127 6373
Fax: +86 21 3127 6365
oldhamgas-info-fr@tyco.com



Learn More.

www.TycoGFD.com