



MODEL DM-600-C2H4


ETHYLENE SENSOR ASSEMBLY

888-367-4286
713-559-9200
fax 281-292-2860
www.detcon.com
sales@detcon.com

SPECIFICATIONS

- Sensor Type**
Electrochemical Fuel Cell
 - Measurement Range**
0-100 ppm Ethylene
Other ranges available
 - Repeatability**
±2% FS
 - Response/Clearing Time**
T90 <140 seconds
 - Span Drift**
<5% signal loss per year
 - Operating Temperature Range**
-20°C to +50°C; -4°F to +122°F
 - Operating Humidity Range**
15-90% RH non-condensing
 - Output**
Linear 4-20 mA DC
RS-485 Modbus™
3 Relays (alarm 1, 2, fault, contacts 5 amp)
 - Input Voltage**
22.5-28 VDC
 - Power Consumption**
2.9 watts @ 24 VDC
 - Electrical Classification**
Explosion proof
Class 1, Div. 1, Groups B, C, D
 - Ingress Protection**
NEMA 4X, IP66
 - Sensor Life/Warranty**
Sensor: 2 year warranty
Transmitter: 2 year warranty
- *The Ethylene sensor is a safety device to detect hazardous conditions, and is not intended for process control application.*
- Safety Approvals**
CSA/NRTL (US OSHA Certified)

DIMENSIONS

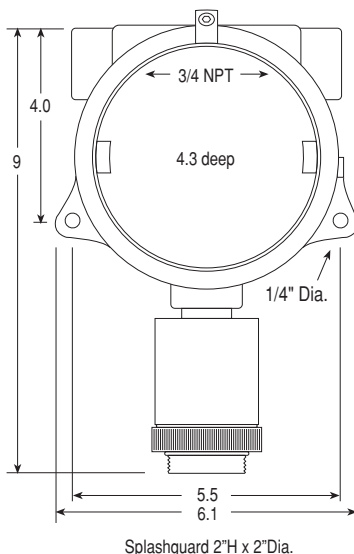


Electrochemical Fuel Cell

MicroSafe™ Intelligent Sensor

DESCRIPTION

Detcon Model DM-600IS-C2H4 sensor is designed to detect and monitor C2H4 in air over the range 0-100 ppm. The sensor assembly consists of an electrochemical fuel cell mounted in an Intrinsically Safe stainless steel and ABS plastic housing that includes a splashguard with integral cal port, a signal conditioning control transmitter circuit, a base connector board and an explosion proof junction box. The Intrinsically Safe sensor housing design allows direct contact of the target gas to the electrochemical sensor, thus maximizing response time, detectability and repeatability. And because the Intrinsically Safe housing design does not use a stainless steel flame arrester, it eliminates inaccurate readings due to target gas absorption.

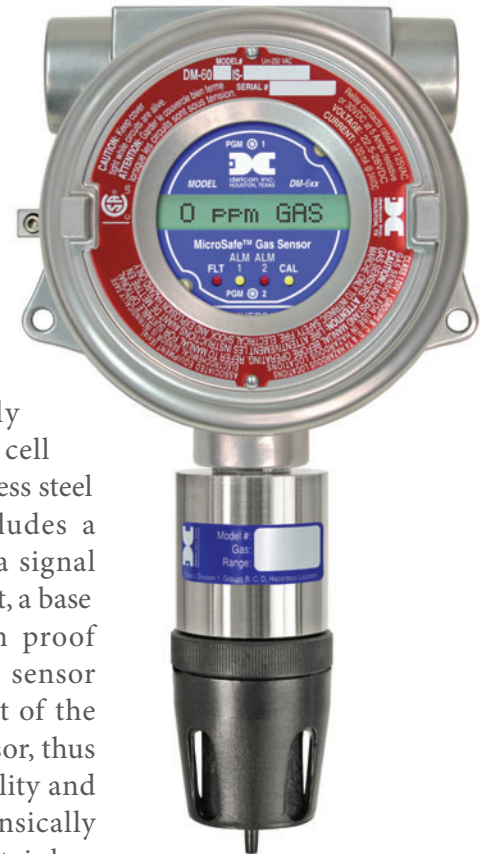

FEATURES

- ▶ CSA and UL Approved: Class 1, Div. 1, Groups B, C, & D
- ▶ Outputs: 4-20 mA, RS-485 Modbus™, 3 relays (2 alarm, 1 fault)
- ▶ Sensor status and parameters accessible via RS-485 Modbus™
- ▶ Simple menu driven calibration - takes less than 3 minutes
- ▶ Backlit LCD, and LED indicators for Fault, and Cal status
- ▶ Universal plug-in transmitter
- ▶ Intrinsically Safe Sensor Housing
- ▶ Plug-in field-replaceable transmitter
- ▶ Electrochemical plug-in sensor

ORDER GUIDE*

- PN 966-12ED80-100 DM-600IS-C2H4 in Aluminum Junction Box
- PN 966-12ED8B-100 DM-600IS-C2H4 in Stainless Steel Junction Box

*Ethylene sensors are not suitable for fruit ripening applications and warranty is not offered for this type of application.

www.detcon.com