

**Axial cameras**

**RIK-3240 | RIK-3240/RO | RIK-5570**



**Pan and tilt cameras**

**RSK-60100 | RSK-78110**



**RIEZLER**

## AXIAL color TV cameras

### RIK-3240

### RIK-3240/RO


### RIK-5570

Application area	DN 40 - DN 150	DN 40 - DN 150	DN 70 - DN 400
Suitable for bends (87° bend)	as of DN50	as of DN50	as of DN100
Automatic horizontal compensation	✘	✓	✓
Waterproof	up to 3 bar	up to 3 bar	up to 5 bar
Material	Stainless steel	Stainless steel	Stainless steel
Pluggable installation	✓	✓	✓
High-resolution color camera module	✓ 420 lines	✓ 420 lines	✓ 480 lines
High performance-lighting	16 LEDs	16 LEDs	12 LEDs
Lens	90°	90°	97°
Focus	Fix focus (5cm - ∞)	Fix focus (5cm - ∞)	Fix focus (5cm - ∞)
Dimensions (Diameter / length)	32 mm / 40 mm	32 mm / 40 mm	55 mm / 70 mm
Weight	ca. 150 g	ca. 190 g	ca. 550 g

## RIK-3240 / RIK-3240/RO




## RIK-5570

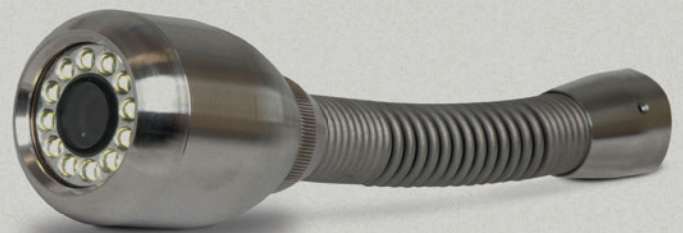


## Camera accessories

### Guide sleeves

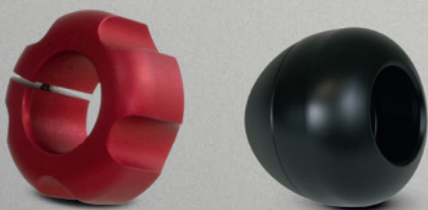

### Guide brushes

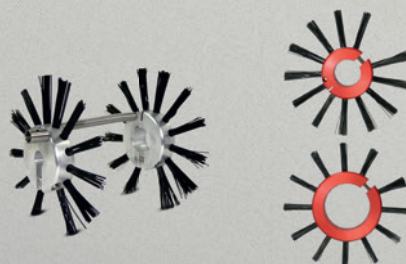

### Skids




## Pan and tilt color TV cameras

## RSK-60100 RSK-78110

Application area	DN 70 - DN 400	DN 100 - DN 400
Suitable for bends (87° bend)	as of DN100	as of DN100
Swivel range	± 115°	± 110°
Waterproof	up to 5 bar	up to 5 bar
Material	Alu-stainless steel	Alu-stainless steel
Pluggable installation	✓	✓
High-resolution color camera module	✓ 420 lines	✓ 480 lines
High performance-lighting	18 LEDs	18 LEDs
Lens	68°	97°
Focus	Electric (1cm - ∞)	Electric (1cm - ∞)
Dimensions (Diameter / length)	60 mm / 100 mm	78 mm / 110 mm
Weight	ca. 680 g	ca. 950 g
Parallel Laser	✓	✗

### RSK-60100

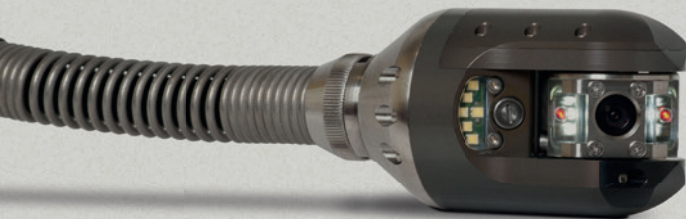

### RSK-78110



internal pressure-supervision  
 automatic horizontal compensation  
 automatic 0-position  
 automatic 90° left / right pan function  
 automatic 360° inspection function

### Remote control



### Satellite module



### Locating transmitter





**RIEZLER Inspektionssysteme GmbH & Co. KG**

Sportplatzweg 5 | 87471 Durach | Germany  
Tel. +49 (831) 27714 | [info@riezler.eu](mailto:info@riezler.eu) | [www.riezler.eu](http://www.riezler.eu)