

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BHF5L

[Link to PDF product's drawing](#)

www.everblue.it/CadDrawings/F20160518082253981PP95BHF5L_..._BHF.m

FEATURES

Model	PP95BHF5L
Type	Pleated polypropylene
Height	9" ¾ - 20"

Micron	1 / 5 / 10 / 20 / 50
Efficiency	95%

Hot sanitizing	No
----------------	----

APPLICATIONS

Water
Sea water

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max working pressure	6 bar
Max differential pressure suggested	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

Code	Description	Height	Micron	Flow l/h ¹	Filtering surface	Quantity box	-
PP95BHF5L0901	PP95BHF5L 09-01	9" ¾	1	3.000	0,50 m ²	1	
PP95BHF5L0905	PP95BHF5L 09-05	9" ¾	5	4.500	0,50 m ²	1	
PP95BHF5L0910	PP95BHF5L 09-10	9" ¾	10	4.500	0,50 m ²	1	
PP95BHF5L0920	PP95BHF5L 09-20	9" ¾	20	4.500	0,50 m ²	1	
PP95BHF5L0950	PP95BHF5L 09-50	9" ¾	50	4.500	0,50 m ²	1	
PP95BHF5L2001	PP95BHF5L 20-01	20"	1	6.000	1,00 m ²	1	
PP95BHF5L2005	PP95BHF5L 20-05	20"	5	9.000	1,00 m ²	1	
PP95BHF5L2010	PP95BHF5L 20-10	20"	10	9.000	1,00 m ²	1	
PP95BHF5L2020	PP95BHF5L 20-20	20"	20	9.000	1,00 m ²	1	
PP95BHF5L2050	PP95BHF5L 20-50	20"	50	9.000	1,00 m ²	1	



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BHF5L

END CAPS LIST

End caps	BIG BHF
CODE	BHF



CARTRIDGE CODE LIST

Model	Height		Micron		Connection		Seals	
PP95BHF5L	9" ¾	09	1	01	BIG BHF	BHF	EPDM	E
	20"	20	5	05				
			10	10				
			20	20				
			50	50				

* standard o-ring


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BHF5L

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

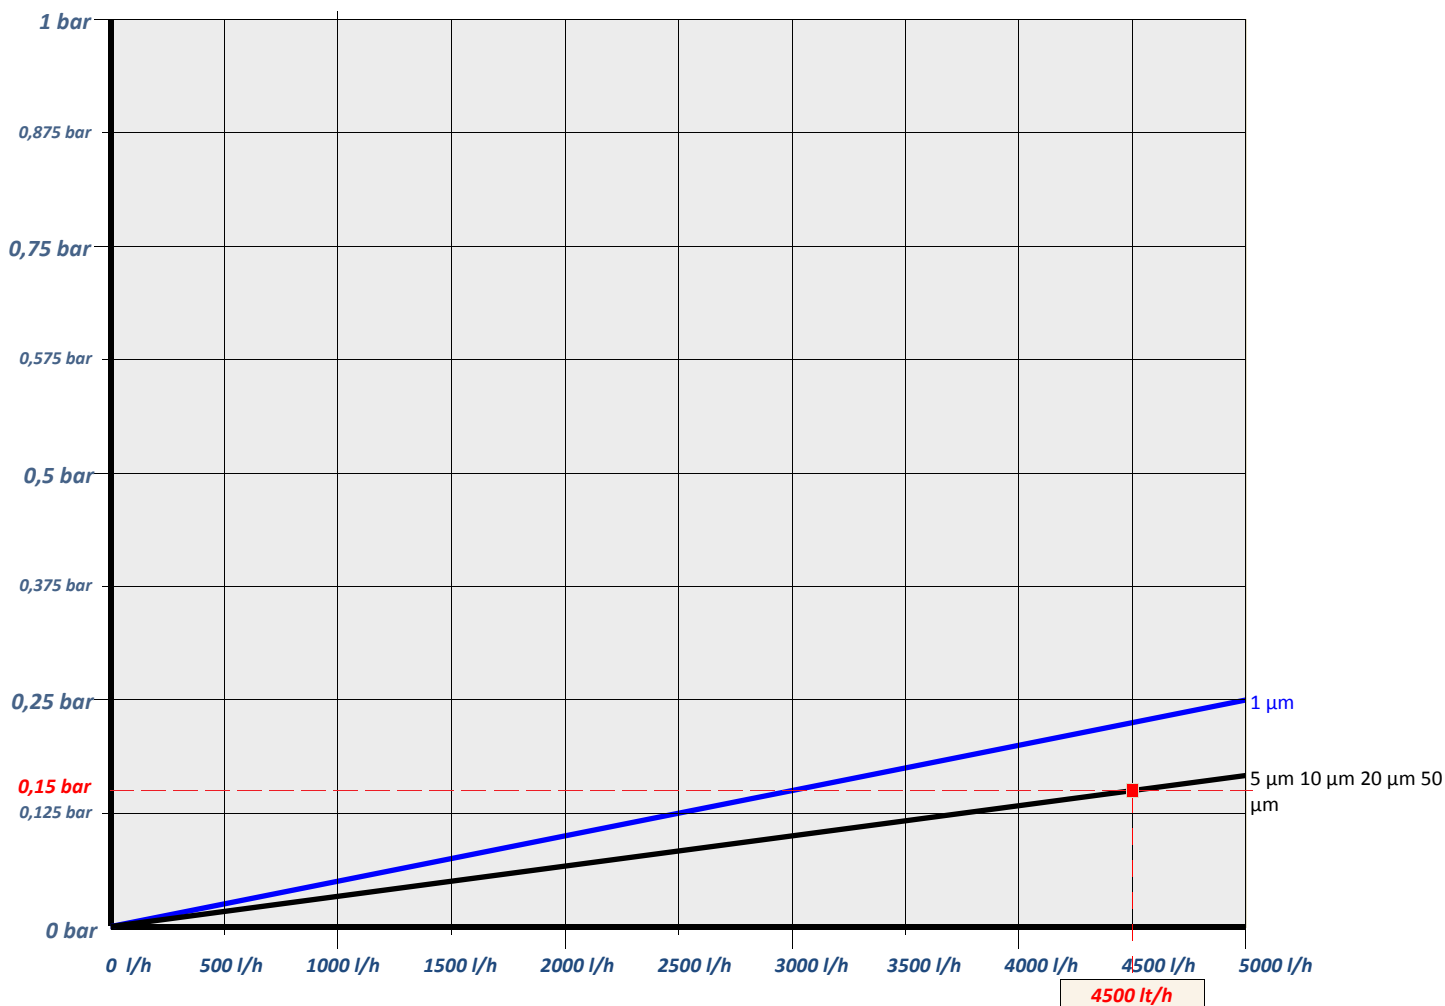

Graphic refers to 9" ¼ height cartridges. Make the correct proportion to obtain flow for taller cartridges.

Flow